



## **CMDP** **COCKPIT MISSION DISPLAY PROCESSOR**

The Cockpit Mission Display Processor (CMDP) is a high safety avionics computer platform with a powerful embedded graphics capability. It is configured using the base of the standard hardware and layered software modules, both developed by adopting the latest quality standards that make the CMDP certifiable according to DO178B and DO254 level B (optionally level A) and suitable as a main cockpit mission computer.

The CMDP is capable of performing highly integrated mission management tasks including embedded dual head cockpit graphics generation and advanced digital map.

The CMDP offers enhanced functionality, innovative graphical features and an innovative Human Machine Interface.


It can be configured to the specific customer's mission requirements utilising a dedicated ground based software tool that is used for the main operating functions.

### **ADDITIONAL FUNCTIONS**

- Management of the Tactical Situation Display, filtering of graphic data, layering of data
- Management of platforms and missions using visualisation of the interactive table of data, menu and dialog windows
- Management of the mission sensors including the settings for operating modes and working parameters
- Integration of tactical data links to allow execution of cooperating missions

The CMDP uses an embedded mass memory to store pre-flight data such as map databases, intelligence data, navigation data and to store data history for flight, mission and maintenance purposes. The typical system configuration for a cockpit mission system includes a single (or optionally dual) CMDP, one or more displays and external sensors from which A/C data and tactical information can be acquired to accomplish the mission.

The CMDP can be provided as a complete system with the operating software or as an open avionics computer that includes hardware and the relevant software equipment as well as standard tools that allow any customer to develop and test its own operating software.

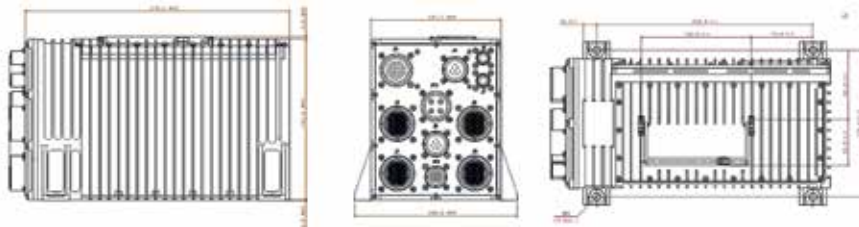

## TECHNICAL SPECIFICATION

### MDP Physical Characteristics

Dimensions	5 MCU
Weight	9.5Kg max
Power Requirements	28VDC
Power Dissipation	85W
Cooling	Convention cooled, closed enclosure
MTBF	2500 operative hours
Connectors	Up to 9 connectors MIL- STD-38999 and 2 Triax for 1553 Avionic-Bus interfacing

### Performances Processing & I/O

Performance	(CPU Board) CPU Speed (frequency): 1.000GHz 2,000 DMIPS 1GB DDR SDRAM
Architecture	Modular Open System Architecture according to VITA 46 (VPX)
System Bus	System bus implemented using High speed Serial bus (PCIe)
Processor Architecture	Modular architecture based on the PCI and PCIe local buses
CPU	AMCC Processor PPC460EX @ 1Ghz
I/O Interfaces	Dual redundant MIL-STD-1553 Interface RS422 serial interfaces RS232 serial interfaces Ethernet 10/100Base T Arinc 429 USB AFDX (optional) Discrete & Analogue
RT Operating System	GHS Integrity 178B
Software Factory	ADA, C
OpenGL	Safety Critical OpenGL

### Environmental

Temperature	-40 °C to +70 °C (operating)
Vibration (random)	0.0452 g <sup>2</sup> /Hz (lh/axis) Functional 0.0125 g <sup>2</sup> /Hz (lh/axis) Endurance
EMC	In accordance with MIL-STD-810 and RTCA/DO-160

### Applicable Standards

MIL-STD-810D
MIL-STD-704D
MIL-STD-462 (Test) & 461 (Req.)
MIL-STD-1553B
EIA-STD-RS422/485
STANAG S3350A, B, C , XGA (synch on green), DVI
RTCA DO-178B level B (optionally level A)
DO-254 level B
ARINC 429
VITA 42.0 & VITA 42.3

### Options for Software

Equipment SW only , in accordance to DO-178B level B (optionally level A)
Equipment SW and Digital Map SW, in accordance to DO-178B level B (optionally level A)
Equipment SW and Operating Flight Program SW, including dual heads EFIS graphics generation, in accordance to DO-178B level B (optionally level A)

## SUPPORTED CARTOGRAPHIC DATA AND MAP FUNCTIONS

### Raster

CADRAG	Scale: 1:7K, 1:33K, 1:50k, 1:66K, 1:100K, 1:250k, 1:500k, 1:1M, 1:2M, 1:5M
CIB	1 mt, 5 mt, 10 mt
Arc Standard Raster Product (ASRP)	Scale: 1:250K, 1:500K, 1:1M, 1:5M
GeoTiff	Type: LAT/LONG, UTM, Lambert

### Vector

Vector Map (VMAP)	Level 0,1
Digital Aeronautical Flight Information File (DAFIF)	Up to 8
Digital Vertical Obstruction	
Format (DVOF)	Type 100 char
Shape	ESRI Shapefile
Digital Chart of the World (DCW)	
SP57	

### Matrix and Algorithms

Digital Terrain Elevation Data (DTED)	Level 0,1,2
Slope Shading	North/West, South/West, South/Est, North/Est
Elevation Banding	Bands user-defined
Dynamic Intervisibility	Number of rays and sector user-defined
Clear Line of Sight (CLOS)	According to DTED available
Dynamic Threat	According to DTED available
Terrain profile (over flight plan)	According to DTED and flight plan available
Terrain awareness	DTED and DVOF input data

### Grid

Universal Transverse Mercator (UTM)	Scale, and grid spacing user-defined
LAT/LONG	Scale, grid spacing and tick spacing user-defined
Distance	Scale, Centre and Grid spacing user-defined

### Graphic Mission Symbology

Graphic lines	Up to 2000
Graphic symbols	Up to 1000
Graphic Points	Up to 1000
Graphic Arcs of circle	Up to 400
Graphic Ellipses	Up to 200
Graphic Circles	Up to 200
Graphic Rectangle	Up to 200
Graphic Squares	Up to 200
Graphic Crown circular sector	Up to 200
Graphic Triangle	Up to 200

### Images

Geo-Referenced Type	Bmp, jpeg, tiff
Not Geo-Referenced	Type Bmp, jpeg, tiff

### Cartographic Database Generation

Map Preparation Facility (MPF)	SW tool (Microsoft Windows based) used to generate map databases starting from cartographic standard and raw data.
--------------------------------	--

Digital map software developed in partnership with Ingegneria Dei Sistemi (IDS)

For more information please email [infomarketing@selex-es.com](mailto:infomarketing@selex-es.com)

Selex ES S.p.A. - A Finmeccanica Company

Via dell'Industria, 4 - 00040 (RM) - Italy - Tel: +39 06 918531

This publication is issued to provide outline information only and is supplied without liability for errors or omissions. No part of it may be reproduced or used unless authorised in writing.

We reserve the right to modify or revise all or part of this document without notice.

2014 © Copyright Selex ES S.p.A.

[www.selex-es.com](http://www.selex-es.com)

ASD MM07901 7-14