


# NERIO-ULR

Optronics Systems

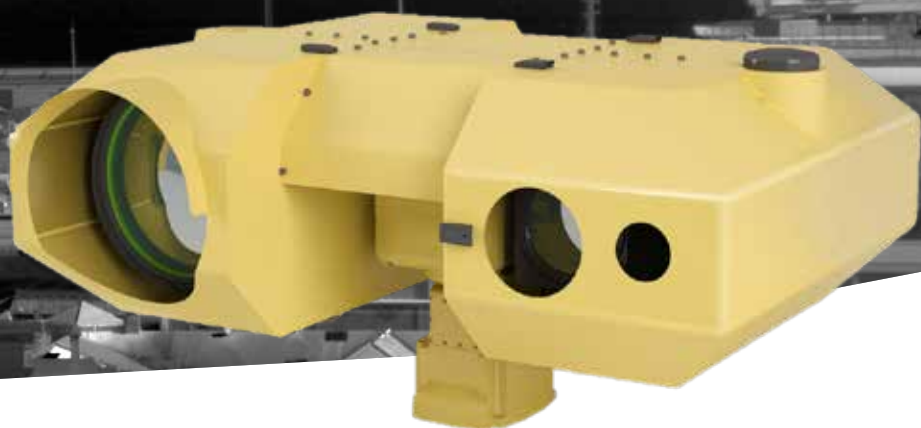

## NERIO-ULR ULTRA-LONG RANGE SURVEILLANCE AND THREAT ACQUISITION SYSTEM

NERIO-ULR is a state of the art modular Electro-Optical (EO) Surveillance, Threat Acquisition (STA) and Reconnaissance system designed to satisfy a broad range of current and emerging customer requirements.

These include:

- Border security and Critical National Infra-Structure protection
- Mobile STA and Reconnaissance
- Coastal surveillance
- Shipborne STA and Situation Awareness

NERIO-ULR integrates world-class EO sensors as part of a fully flexible payload configuration together with a gyro-stabilised director mechanism enabling capability, cost and performance to be optimised according to specific customer needs. Utilising the Horizon Thermal Imaging (TI) camera for provision of a 24hr operational capability, NERIO-ULR combines an 11° to 0.9° zoom field-of-view high definition (HD) TI with a 360° x ±50° system field of regard. Additional to

the Horizon camera, the standard NERIO-ULR sensor payload configuration includes a high-definition colour day TV camera with a compatible zoom field of view and optional, eye-safe Laser Rangefinder (LRF) to supplement the surveillance capability and enable threat identification and geospatial location. The combination of high definition imaging performance, sightline stability and field coverage enables customers to conduct surveillance acquisition operations from short to very long-range with a single EO system asset.

The modular payload and communication architecture of NERIO-ULR enables the Day TV Camera and LRF solutions to be tailored to meet specific customer performance, cost and capability needs. Additional special to role modules, e.g. illuminators, dazzle sources and GPS receiver, can also be offered to meet specific operational needs. Performance of the Horizon TI camera enables the identification of threats at ranges typically beyond the effective range of the threat, enabling early counteraction to be initiated.




A Finmeccanica Company

[selex-es.com](http://selex-es.com)

# NERIO-ULR

## RANGE PERFORMANCE (KM)

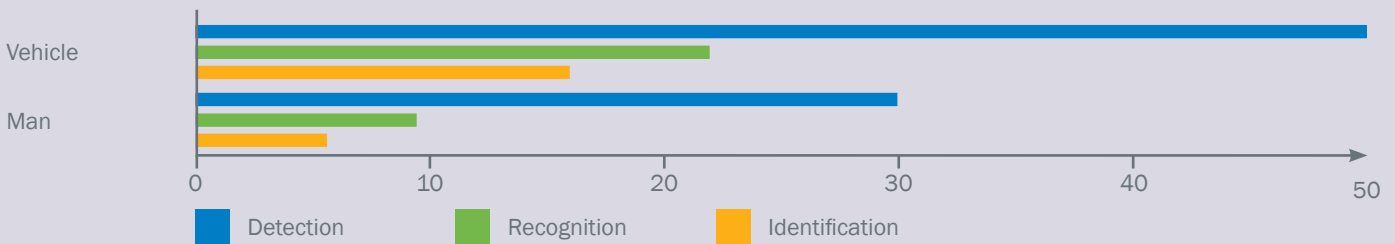

NERIO-ULR is designed to facilitate use in direct mounting to platforms, masts or static tower mounted applications. The Horizon TI incorporates a long-life cooling engine enabling extended maintenance free operation whilst the design of NERIO-ULR enables ready access to the cameras for ease of maintenance when required.

## KEY FEATURES AND BENEFITS

### Gyro-stabilised EO payload

Enables operation on fixed installation and optimised performance in mast/tower mounted applications.

### Continuous 360° x ±50° coverage

Provides a solution for ultra-long-range surveillance and threat identification and geolocation.

### Horizon-HD thermal imager

World-Class true HDTI performance coupled with a full range continuous 11° to 0.9° zoom lens enabling high-performance, 24hr operation.

### Modular payload architecture

Enables the NERIO-ULR system level capability to be optimised for customer specific cost, capability & performance needs and accommodate special to role payloads for specific operational applications.

Open-standards, IP based control interfaces  
Enables NERIO-ULR to be easily interfaced with customer specific security or mission system solutions, including the network enabled operation.

### Rugged design

Enables NERIO-ULR to be utilised against a broad range of operational requirements across a global environment, including static or mobile and land or coastal environment.

### High availability

50,000 hour long life TI cooling engine enables extended maintenance free operation with high reliability.

### Optional capabilities

- Gyro-stabilised or unstabilised NERIO-ULR variants
- Integrated GPS
- Automatic Threat Detection and Tracking
- Modular system control and display solutions
- Operational deployment solutions
- Special-to-role EO modules, e.g. illuminator and dazzle sources

## TECHNICAL SPECIFICATION

Gyra stabilised head	
Field of regard	Continuous 360° x ±50°
Angular speed	60°/s (max)
Pointing accuracy	0.056° 1σ in both axis
Stabilisation performance	200μrad (1σ)
Horizon	
Resolution	1280 x 720 (720p)
Operating waveband	3μm to 5μm
Sensitivity	23mK NETD (Typical)
Optical field of view	Continuous zoom: 11° x 6.2° to 0.9° x 0.5°
Autofocus	On demand
Colour day TV camera	
Resolution	1280 x 720
Optical field of view	Continuous zoom: 9.3° to 0.28° (horizontal)
Auto focus	On demand and zoom triggered
Eyesafe LRF	
Laser type	Er Glass
Laser safety	Class 1
Wavelength	1540nm
Range	80m to 20km
Accuracy	±5m (1σ)
System and environmental	
Power supply	18v - 32v dc
Operating temperature range	-32°C to +71°C



For more information please email [infomarketing@selex-es.com](mailto:infomarketing@selex-es.com)

Selex ES Ltd. - A Finmeccanica Company

First Avenue - Millbrook Industrial Estate - Southampton - Hampshire - SO15 0LG - Tel: +44 (0) 2380 702300

This publication is issued to provide outline information only and is supplied without liability for errors or omissions. No part of it may be reproduced or used unless authorised in writing.

We reserve the right to modify or revise all or part of this document without notice.