

COMPACT, LIGHTWEIGHT AIRBORNE GROUND SURVEILLANCE RADAR

The PicoSAR Active Electronically Scanned Array (AESA) radar provides an unrivalled all-weather capability for Unmanned Aerial Systems, fixed wing and helicopter platforms.

Building on over 50 years of experience in the airborne radar field, PicoSAR combines our knowledge with the latest technology to meet the evolving requirements of the 21st century.

KEY FEATURES

The key to PicoSAR is the use of AESA technology in a small, compact configuration. Using many low power, solid state Transmit/Receive Modules (TRM) within its array, the PicoSAR radar is more reliable than conventional radar systems.

For the most compact installations PicoSAR can be mounted directly onto the platform and the beam steered electronically, or it can be mounted on a gimbal for an even greater field-of-view.


PicoSAR consists of a single small Line Replaceable Unit (LRU). This LRU can be reconfigured if required to ease installation, by detaching the antenna unit from the processor unit.

In addition, due to the flexibility of AESA technology the radar antenna can be resized to address specific platform constraints or customer performance requirements.

KEY BENEFITS

- Excellent performance
 - High resolution ground mapping
 - Wide area coverage
 - High performance GMTI
- Low cost of ownership
- Reconfigurable radar system
- Lightweight
- Compact
- Very high reliability
- Easy to install and use.

PICOSAR

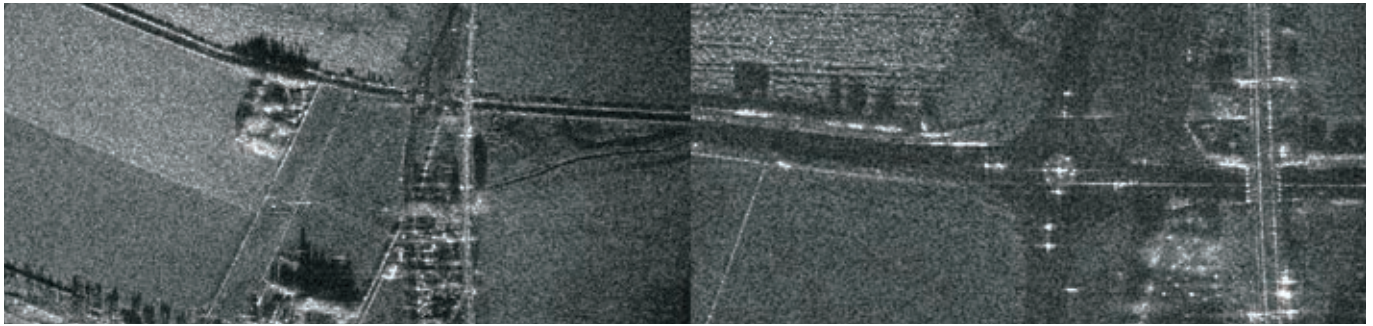

PicoSAR delivers a high resolution Synthetic Aperture Radar (SAR) imaging and Ground Moving Target Indication (GMTI) capability that permits new and existing platforms to easily acquire a true, all-weather ground mapping and surveillance capability. Its compact size, low weight and low power consumption permit installation in parallel with electro-optical/infrared sensors even on platforms with limited payloads.

To maintain our leading position, we have been developing AESA technology since the early 1990s, and we now have a range of AESA products available to meet the airborne radar market requirements.

PicoSAR is one of a family of AESA radars that includes the Vixen family of fire control radars and the Seaspray family of surveillance radars which are in operation in the United States, on the USCG HC-130H aircraft and under contract for the UK Royal Navy Surface Combatant Maritime Rotorcraft (Future Lynx).

TECHNICAL SPECIFICATION

Frequency	X band
Scan Coverage	±45°
Maximum Range	20km (resolution dependant)
Map Resolution	<1m
Cooling	Unconditioned Air (existing internal fans)
Weight	10kgs
Input Power	<300W 28V DC

PicoSAR utilises common technology and techniques used on our other radar programmes.

RELIABILITY


The PicoSAR radar minimises the impact of transmitter and receiver failure by using many solid state Transmit/Receive Modules within a fixed array. As a result component failures within the array demonstrate graceful performance degradation rather than complete system failure, thereby delivering the highest levels of operational availability.

DIMENSIONS		
	Antenna	Processor
Height	220 mm	200 mm
Width	310 mm	200 mm
Depth	85 mm	125 mm
	(140 mm max)	
Electrical Interface Connectors	Global Positioning System (GPS) antenna feed	
	28V DC power and Ethernet	

CAPABILITIES	
Ground Mapping	Strip SAR
	Spotlight SAR
Moving Target Detection	GMTI

BACKGROUND

Our company has been at the forefront of airborne radar capability since the 1950s when the AI23 radar became the world's first high power monopulse radar to enter squadron service.

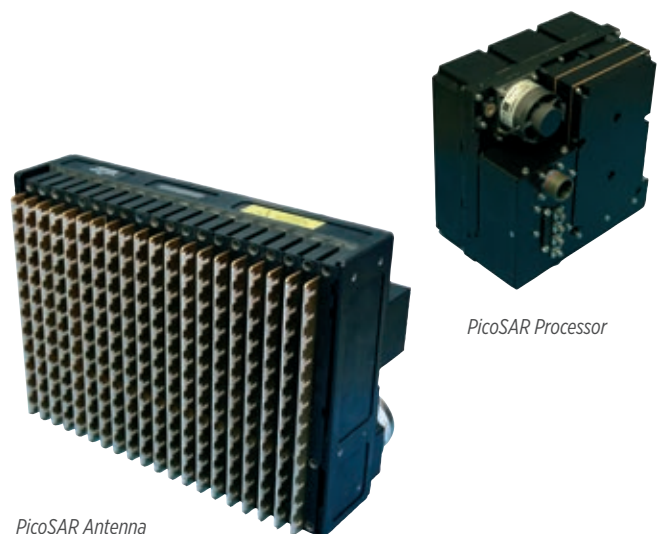

PicoSAR Antenna

PicoSAR Processor